

Actuator

46-
2COP.1920.000

Distribution by
DigiKey

DigiKey



<https://www.digikey.eao.com/component/46-2COP...>

Your product:



46-2COP.1920.000 Actuator

Loading ...

FRONT

Front dimension: Ø 40 mm

Front form: Round

MOUNTING

Design: Raised

Mounting cut-out: Ø 22.3 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens colour: Red

Lens material: Plastic

Lens illumination: Illuminated

Lens shape: Mushroom-head

Lens optics: translucent

Illumination colour: Red

ELECTRICAL CHARACTERISTICS

Pollution degree: 3

Protection class: II, according to EN / IEC 61140

MECHANICAL CHARACTERISTICS

Release type: Twist / Pull to unlock

Mechanical lifetime: 500 000 cycles of operation
Tightening torque: 2 ... 3 Nm (17.7 ... 26.6 Lb-in)
Weight: 0.036 kg

AMBIENT CONDITION


IP front protection: IP66
IK front protection: IK03
Operating temperature: - 40 °C ... + 70 °C
Shock resistance: 30g, 18ms (EN-IEC 60068-2-27)
50g, 11ms (EN-IEC 60068-2-27)
Vibration resistance: 5g f= 2...500Hz (EN-IEC 60068-2-6)
Climate resistance: +25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)

CERTIFICATE

Conformities: CE
REACH: REACH compliant
RoHS: RoHS compliant
Standards: CEI EN 61373, IEC EN 60947-1, IEC EN 60947-5-1, IEC EN 60947-5-5, UNI EN ISO 12100, UNI EN ISO 13850

OTHER

Short Description: Actuator, Ø 22.3 mm, Ø 40 mm, Mushroom-head, Illuminated, Red, Plastic, translucent, Round, IP66, IK03, Twist / Pull to unlock, Red
Dimension: Ø 40 mm
Housing colour: Yellow
Housing material: Plastic
max. number of switching elements: 4
Mounting cut-outs:

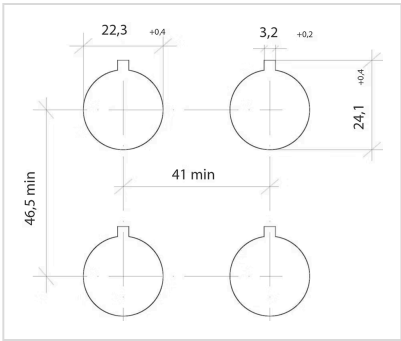

Dimension drawings:

